


Spherical Double Row Full Complement Roller Bearing (positioning type)

VISTA®
Bearing

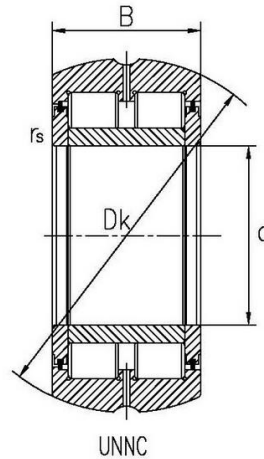

Bearing NO.	INA No.	Boundary dimensions(mm)					Basic load ratings(kN)		Limiting speed(r/min)	Weight (kg)
		d	D	B	rsmin	s	Cr	Cor		
UNNC 016V	SL05 016E	80	120	45	1.1		172	300	1300	1.7
UNNC 018V	SL05 018E	90	140	50	1.5		219	370	1200	2.8
UNNC 020V	SL05 020E	100	150	55	1.5		280	490	1100	3.3
UNNC 022V	SL05 022E	110	170	60	2		340	620	950	4.9
UNNC 024V	SL05 024E	120	180	60	2		350	660	850	5.2
UNNC 026V	SL05 026E	130	200	65	2		435	810	800	7.4
UNNC 028V	SL05 028E	140	210	70	2		495	930	750	8.2
UNNC 030V	SL05 030E	150	225	75	2.1		540	1020	700	10
UNNC 032V	SL05 032E	160	240	90	2.1		660	1260	650	13.7
UNNC 034V	SL05 034E	170	260	95	2.1		760	1420	600	17.4
UNNC 036V	SL05 036E	180	280	100	2.1		790	1520	550	22.1

Spherical Double Row Full Complement Roller Bearing (positioning type)

UNNC 038V	SL05 038E	190	290	110	2.1		950	1850	550	25.1
UNNC 040V	SL05 040E	200	310	115	2.1		1070	2060	500	30.5
UNNC 044V	SL05 044E	220	340	125	3		1260	2440	460	40
UNNC 048V	SL05 048E	240	360	130	3		1310	2600	430	44